


# CLIMBING COMBINATION WITH 4 TOWERS (2 SLIDES OF STAINLESS STEEL)

JOC-66A22\_ALU

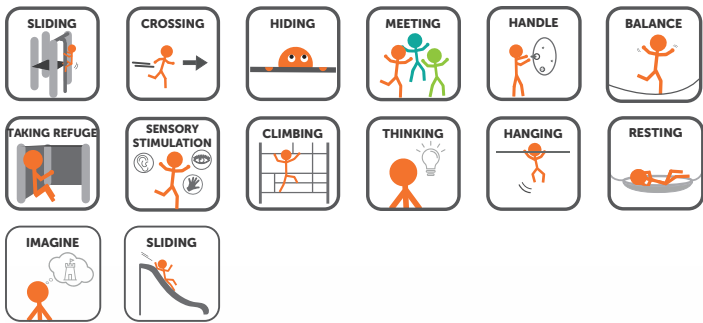

Physical disability

Sensory disability

Mental disorders



## TECHNICAL DATA SHEET



EN 1176



+ 3 years



50 users



1080 x 808 x 352 cm.



150-250 cm.



88,50 m<sup>2</sup>

### Structure

Aluminium EN-AW 6063, anodized

### Panels

HDPE (High-density polyethylene) 13 and 19 mm

### Platforms

Phenolic nonslip plywood 15 and 18 mm

### Bars

Stainless steel

### Ropes

Armed rope with steel core and multiple polypropylene strings

### Sliding soles

Stainless steel 130cm + 150cm.



3 px.





10 h.



819 kg.

Playground structure formed by four towers with shed roofs and platforms of 100x100cm. Platforms at different height (2 at 1,30m and 2 at 1,50m). The towers are connected to each other via various types of climbing structures and balance bridges. Access to the towers with an inclined climbing net or via spiral stairs which are connected to a bar. Descending from the towers with two slides of 130cm and 150cm, with sliding bars or with a firemen's bar. The structure includes two activity panels and a counter for role play.

Rope connectors made of nylon. Screws made of galvanised / stainless steel and hidden by nylon coverings. Installation of the posts with ground sleeves of hot-dip galvanised steel.

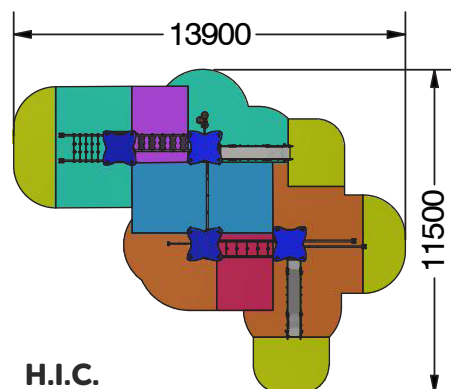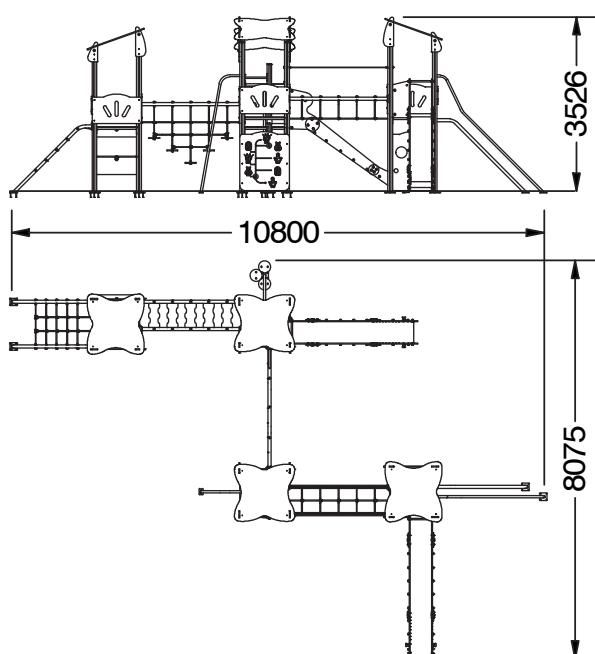

### H.I.C.

100 cm.	19,40 m <sup>2</sup>
130 cm.	21 m <sup>2</sup>
150 cm.	24,70 m <sup>2</sup>
180 cm.	5,40 m <sup>2</sup>
190 cm.	5,50 m <sup>2</sup>
250 cm.	12,50 m <sup>2</sup>