


CLIMBING COMBINATION WITH 3 TOWERS (SLIDE STAINLESS STEEL)

JOC-66B2



Physical disability

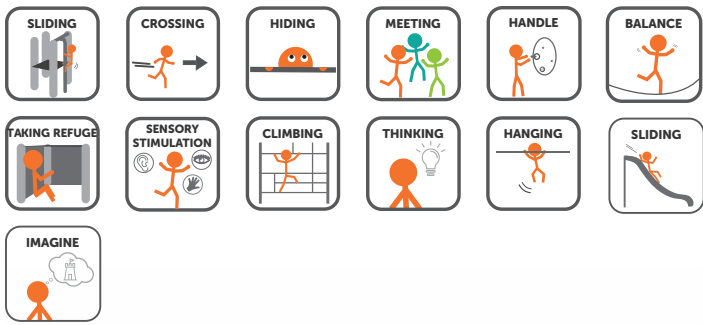

Sensory disability



Mental disorders



TECHNICAL DATA SHEET



EN 1176



+ 3 years



42 users



736 x 710 x 352 cm.



150-250 cm.



67 m²

Structure	Laminated Swedish pinewood autoclave treated
Panels	HDPE (High-density polyethylene) 13 and 19 mm
Platforms and steps	Phenolic nonslip plywood 15 and 18 mm
Bars	Stainless steel
Ropes	Armed rope with steel core and multiple polypropylene strings
Sliding sole	Stainless steel 130cm



3 px.



8 h.



668 kg.

JOC-66B2

CLIMBING COMBINATION WITH 3 TOWERS (SLIDE STAINLESS STEEL)

Playground structure formed by three towers with shed roofs and platforms of 100x100cm. Platforms at different height (1,30m and 1,50m). The towers are connected to each other via climbing structures and balance bridge. Access to the towers with an inclined climbing net or via spiral stairs which are connected to a bar. Descending from the towers with a slide, with sliding bars or with a firemen's bar. The structure includes two double-sided activity panels (labyrinth, pairs, gearwheels,...). Bars of stainless steel. Rope connectors made of nylon. Screws made of galvanised steel and hidden by nylon coverings. Installation of the posts with ground sleeves of hot-dip galvanised steel.

