


CLIMBING COMBINATION WITH 3 TOWERS (2 SLIDES OF STAINLESS STEEL)

JOC-66B22_ALU

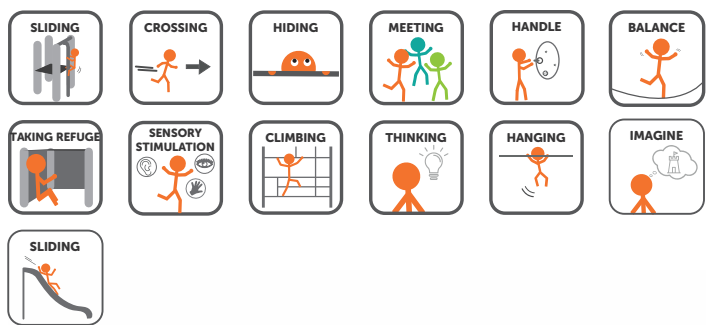

Physical disability

Sensory disability

Mental disorders



TECHNICAL DATA SHEET



EN 1176



+ 3 years



43 users



808 x 700 x 352 cm.



150-250 cm.



65,80 m²

Structure

Aluminium EN-AW 6063, anodized

Panels

HDPE (High-density polyethylene) 13 and 19 mm

Platforms

Phenolic nonslip plywood 15 and 18 mm

Bars

Stainless steel

Ropes

Armed rope with steel core and multiple polypropylene strings

Sliding soles

Stainless steel 130cm + 150cm.



3 px.





8 h.



639 kg.

Playground structure formed by three towers with shed roofs and platforms of 100x100cm. Platforms at different height (1,30m and 1,50m). The towers are connected to each other via a vertical climbing structure and a balance bridge. Access to the towers with spiral stairs which are connected to a bar or with the climbing net. Descending from the towers with two slides of 130cm and 150cm, with sliding bars or with a firemen's bar. The structure includes two activity panels and a counter for role play.

Rope connectors made of nylon. Screws made of galvanised / stainless steel and hidden by nylon coverings. Installation of the posts with ground sleeves of hot-dip galvanised steel.

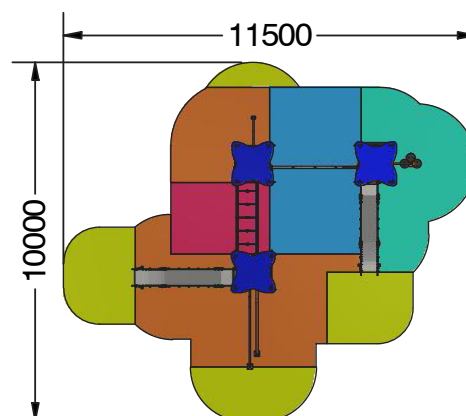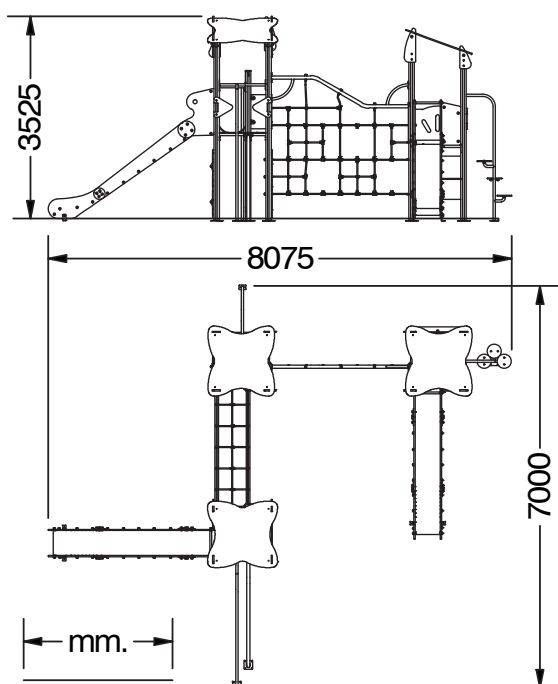

H.I.C.

100 cm.	15,20 m ²
130 cm.	12,40 m ²
150 cm.	23,50 m ²
190 cm.	5,50 m ²
250 cm.	11,90 m ²